



INTERACT

Quick Start Guide
Getting started with Qwizdom

Qwizdom[®]

Thank you for purchasing Qwizdom Interact.

The quick start guide is designed to help you set up your Qwizdom set. A more extensive guide is available at www.qwizdom.com under Support.

Table of Contents

- ① Check the set contents
- ② Installing Qwizdom Interact
- ③ Installing the USB Drivers
- ④ Setting up your remotes
 - Assigning Fixed Numbers
 - Common Screen Displays

If you need assistance:

Phone

253.770.1285

Live Support Hours: 6am-4:30pm PST

Email

support@qwizdom.com

Web

www.qwizdom.com

1 CHECK THE SET CONTENTS

You should have the following items:



Qwizdom Set also includes:

Documentation

License Agreement & Warranty

Qwizdom
Customer Returns, Refund & Exchange Policy

Thank you for ordering from Qwizdom. We strive to offer the best quality products, and want you to be completely satisfied with your purchase. Qwizdom products are guaranteed to be free from defects and workability for one (1) year from the date of purchase. This warranty is not valid if products have been damaged from misuse or abuse by the end-user. Qwizdom representatives and dealers who have specific instructions for repair of failing hardware components (if any) apply. Please discuss with your local representative for this information.


Please inspect your Qwizdom order carefully, to make sure it is complete. If you believe we are missing any portion of the order, please contact the Qwizdom representative who you placed the order with, or call our customer service department at (253) 845-7758 within 30 days from receipt of the order. Any damaged or defective products will be replaced with the same product. Please contact our tech support team at (253) 776-5388 your first assistance is within our purview.

If for any reason you are unsatisfied with your purchase and product is not defective, simply obtain an RMA number from your representative and return a copy of this notice date. Please note that there is a 10% restocking fee for all returned products that must be paid prior to receiving an RMA number. A small return fee is charged from the product's related freight, reshipment condition.

In order to return products, you must:

- Please contact the Qwizdom representative who placed the order with, or call our service department at (253) 845-7758 to obtain an RMA number. Return subscriptions via

Remote Index Card



Software

Qwizdom Interact




Curriculum*



* Depending on your order

2 INSTALLING QWIZDOM INTERACT

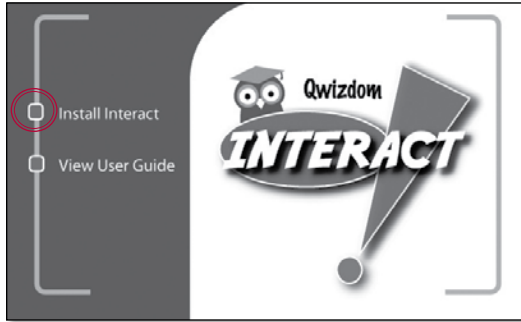

- Place the Qwizdom Interact disc into your CD-ROM drive
- Click on “Install Interact”
- Follow the InstallShield wizard
- You may need to restart your computer when finished

Note:

If the CD does not run automatically,

- Go to the CD-ROM drive
- Right-click on the Qwizdom Interact Icon
- Double-click the Setup.exe file



The Qwizdom Interact icon will appear on your desktop after installation.

3 INSTALLING USB DRIVERS



- With the Qwizdom Interact disc in the CD-Rom drive, connect the RF Host to your USB Port using the supplied USB Cable
- A window will appear indicating that the drivers have been successfully installed. If this does not happen follow the steps below to manually install the drivers

Windows 2000/XP

1

- From the Start menu, go to the Control Panel or go to Settings and then Control Panel
- Double-click on the System icon



2




- Click on the Hardware tab
- Click on the “Device Manager” button
- Select “View Devices by Type” under the View menu

3




- Right-click on the RF Host found under one of the following: Ports, Universal Serial Bus Controllers, Unknown or Other Devices
- Select "Update Driver"

4

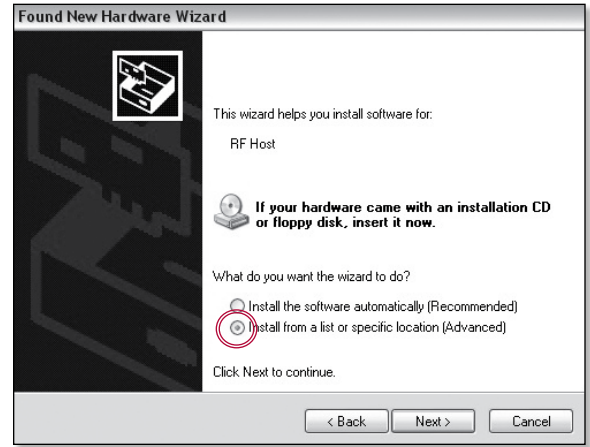

- The "Found New Hardware" wizard appears
- Select "Install from a list or specific location"
- Click "Next"

5

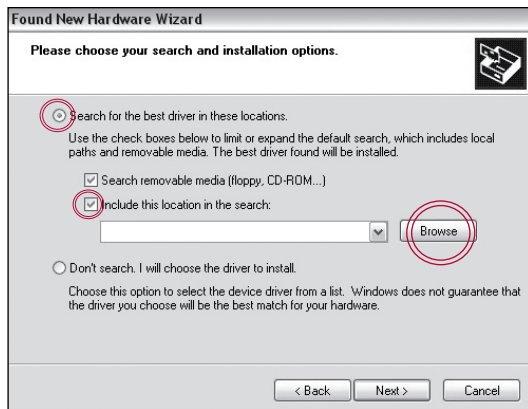

- Select “Search for the best driver in these locations”
- Check “Include this location in search”
- Click on “Browse” and the “Browse for Folder” window appears
- Go to My Computer and select the USB drivers folder located on the Qwizdom Interact disc
- Click “OK” and then click “Next”
- A prompt will appear that says the drivers have not passed the Microsoft Windows Update testing-- click on “Continue Anyway”
- Click on “Finish”

6

The “Found New Hardware” wizard should appear for a second time. This is because there are two drivers for the RF host. Follow prompts to install the second USB driver.

7

The RF host is now installed and the green light on the front should be lit.




Windows Vista

1

- From the Start menu, go to Settings, Control Panel, and then Device Manager
- Select “View Devices by Type” under the View menu




2

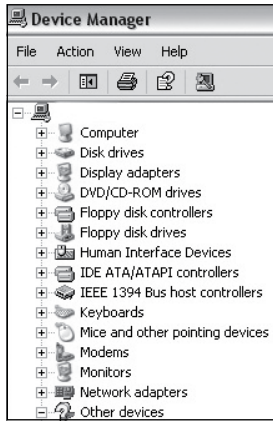

- Right-click on the RF Host found under one of the following: Ports, Universal Serial Bus Controllers, Unknown or Other Devices
- Select “Update Driver”

3

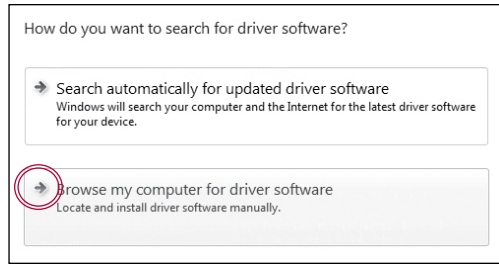

- Select "Browse my computer for software driver"
- Click "Next"

4



- Click on "Browse" and the "Browse for Folder" window appears
- Click on My Computer, then select the USB drivers folder located on the Qwizdom Interact disc
- Click "OK" and then "Next"

5

- When it's done installing, click on "Close"
- Repeat the above steps once more and then restart your computer

6

The RF host is now installed and the green light on the front should be lit.



4 SETTING UP YOUR REMOTES

1




Double-click on the Qwizdom Interact icon on your Desktop.

2



Once Qwizdom Interact is open, click on the "Remotes" button in the toolbar.

3

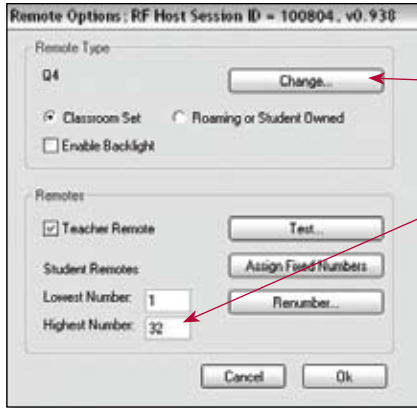


The Remote Options window will appear:

- Click on "Change" to select your remote type
- Adjust the lowest/highest number setting for your remote set

Assigning Fixed Numbers

This procedure only needs to be done once, unless you change computers or hosts.

4

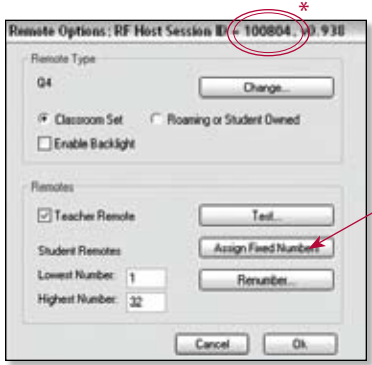

- Click on "Assign Fixed Numbers"
- The "Assign Remotes" window appears



T	5	10	15
1	6	11	16
2	7	12	17
3	8	13	18

What is a Session ID?

The Session ID is the host's unique ID. Entering the Session ID into the remotes lets them know which host to communicate with.

Where is the Session ID located?

- *1. In the Remotes Options title bar
- *2. In the Assigned Fixed Numbers title bar
3. On the bottom of the RF Host

Q4RF Remotes

- 1 Turn on your remotes.



- Hold down the MENU button for a few seconds to turn on the remote

Q4^{RF}

- 2 The remote may ask for a Session ID.



- 3 Enter the Session ID.



- Use the key pad to enter the Session ID and press the SEND button



- 4 The remote will try to connect to the host.



5



T	5	10	15	20	25	30
1	6	11	16	21	26	31
2	7	12	17	22	27	32
3	8	13	18	23	28	
4	9	14	19	24	29	

When the remote connects to the RF Host, the remote's number box will light up in blue on the screen. The remote number will appear in the upper right of the remote's LCD screen and display "Qwizdom."

After all remotes have connected to the host, click on "Save" at the bottom to exit the "Assign Remotes" window.

6

Exit remote options.




- To exit the Remote options screen, press "OK"

Q5RF Remotes

Note: The following applies to both the Q5RF presenter and participant remotes.

1 Switch on your remotes.

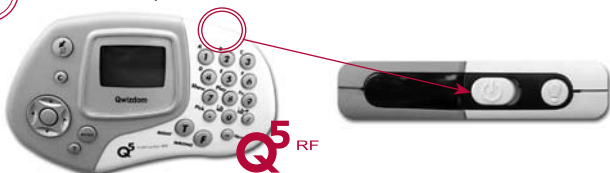


The power switch for the Q5RF is located on the top of the remote. Slide the power switch to the right to turn on.

2 The remote may ask for a Session ID.



3 Enter the Session ID.



- Use the keypad to enter the Session ID and the press SEND button 

4 The remote will try to connect to the host.



5



Participant

T	5	10
1	6	11
2	7	12
3	8	13
4	9	14

or

Instructor


T	5	10
1	6	11
2	7	12
3	8	13
4	9	14

When the participant remote connects to the RF Host, the remote's number box will light up in blue on the screen. The remote number will appear on the remote's LCD screen and display "Remote #1." When the instructor remote connects to the RF host, the T will light up in blue on the screen.

After all remotes have connected to the host click on "Save" at the bottom to exit the "Assign Remotes" window.

6

Exit remote options.

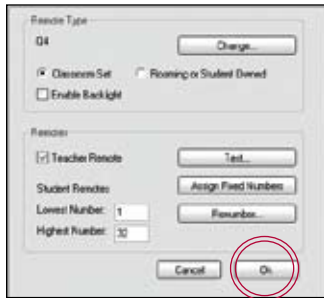

- Press "OK" to exit the Remotes Option Window

Common Screen Displays

- **Qwizdom:** Displays when slides are non-question types such as lessons or information.
- **Ready:** Displays on the instructor remote when remote is ready to use.
- **Last Key:** Will appear on the instructor's remote showing the last key that was pressed.
- **Activity ID:** Requesting an Answer Key activity number. Prompt only appears when multiple test versions are being presented. Activity numbers should be noted on the test sheets before presenting; numbers cannot be viewed while in presentation mode.
- **Loading:** An answer key is loading; may take a few moments.
- **Push Key:** Remote is idle. Press any key, (except "Menu") to reactivate.
- **Inactive:** Remote senses the host is not in use or does not recognize the session. If remote remains inactive after starting a presentation, reenter "Session ID" by scrolling right to "Sess.ID" and pressing "Send." When prompted, reenter the session ID and press "Send."
- **No Net:** Remote cannot find the network. Reenter the "Session ID." If "No Net" continues, enter "User ID" and "Session ID."
- **Denied:** User denied due to incorrect session user ID, or a duplicate ID.

Qwizdom®



Qwizdom • 12617 Meridian East • Puyallup, WA • 1.800.347.3050 • www.qwizdom.com